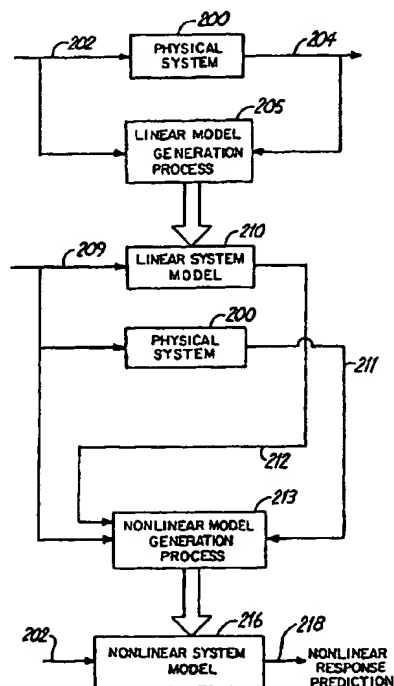INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification: G06G 7/48	**A1**	(11) International Publication Number: **WO 00/23934**
		(43) International Publication Date: 27 April 2000 (27.04.2000)

(21) International Application Number: PCT/US99/24345	**Published**
(22) International Filing Date: 19 October 1999 (19.10.1999)	
(30) Priority Data:	

(30) Priority Data:
09/420,023	18 October 1999 (18.10.1999)	US
60/105,155	21 October 1998 (21.10.1998)	US
60/112,266	15 December1998 (15.12.1998)	US

(60) Parent Application or Grant
MTS SYSTEMS CORPORATION [/]; (). BARBER, Andrew, J. [/]; (). KOEHLER, Steven, M. ; ().

(54) Title: GENERATING A NONLINEAR MODEL AND GENERATING DRIVE SIGNALS FOR SIMULATION TESTING USING THE SAME

(54) Titre: CREATION D'UN MODELE NON LINEAIRE ET PRODUCTION DE SIGNAUX DE COMMANDE POUR TESTS DE SIMULATION UTILISANT LEDIT MODELE

(57) Abstract

A method and system for generating an improved nonlinear system model (216) includes generating a linear system model (210) and using a response (212) therefrom to generate the nonlinear system model (216). A method and system for generating drive signals for a test system uses the improved nonlinear system model (216) or a conventional nonlinear system model (122).

(57) Abrégé

L'invention concerne un procédé et un système, permettant de créer un modèle de système (216) non linéaire perfectionné, qui consiste à créer un modèle de système (210) linéaire, et à utiliser une réponse (212) provenant dudit système, pour créer le système de modèle (216) non linéaire. Un procédé et un système permettant de produire des signaux de commande pour un système de test utilisent le système de modèle (216) non linéaire perfectionné ou un système de modèle (122) non linéaire classique.

(51) International Patent Classification ^{6} : **G06G 7/48**	**A1**	(11) International Publication Number: **WO 00/23934** (43) International Publication Date: 27 April 2000 (27.04.00)

(54) Title: GENERATING A NONLINEAR MODEL AND GENERATING DRIVE SIGNALS FOR SIMULATION TESTING USING THE SAME

(57) Abstract

A method and system for generating an improved nonlinear system model (216) includes generating a linear system model (210) and using a response (212) therefrom to generate the nonlinear system model (216). A method and system for generating drive signals for a test system uses the improved nonlinear system model (216) or a conventional nonlinear system model (122).

Description

5

10

15

20

25

30

35

40

45

50

55

-1-

GENERATING A NONLINEAR MODEL AND GENERATING DRIVE SIGNALS FOR SIMULATION TESTING USING THE SAME

BACKGROUND OF THE INVENTION

5   The present invention relates to computer modeling of a system, machine or process. More particularly, the present invention relates to generating an improved nonlinear system model, such as a neural network, as well as using a nonlinear system

10   model or the improved nonlinear system model to generate drive signals as input to a vibration system.

Vibration systems that are capable of simulating loads and/or motions applied to test specimens are generally known. Vibration systems are

15   widely used for performance evaluation, durability tests, and various other purposes as they are highly effective in the development of products. For instance, it is quite common in the development of automobiles, motorcycles, or the like, to subject the

20   vehicle or a substructure thereof to a laboratory environment that simulates operating conditions such as a road or test track. Physical simulation in the laboratory involves a well-known method of data acquisition and analysis in order to develop drive

25   signals that can be applied to the vibration system to reproduce the operating environment. This method includes instrumenting the vehicle with transducers "remote" to the physical inputs of the operating environment. Common remote transducers include, but

30   are not limited to, strain gauges, accelerometers, and displacement sensors, which implicitly define the operating environment of interest. The vehicle is then driven in the same operating environment, while remote

-2-

transducer responses (internal loads and/or motions)
are recorded. During simulation with the vehicle
mounted to the vibration system, actuators of the
vibration system are driven so as to reproduce the
5 recorded remote transducer responses on the vehicle in
the laboratory.

However, before simulated testing can occur,
the relationship between the input drive signals to
the vibration system and the responses of the remote
10 transducers must be characterized or modeled in the
laboratory. This procedure is referred to as "system
identification" and involves obtaining a respective
linear model or transfer function of the complete
physical system (e.g. vibration system, test specimen,
15 and remote transducers) hereinafter referred to as the
"physical system" and calculating an inverse system
linear model or transfer function of the same. The
inverse linear system model or transfer function is
then used iteratively to obtain suitable drive signals
20 for the vibration system to obtain substantially the
same response from the remote transducers on the test
specimen in the laboratory situation as was found in
the operating environment.

As those skilled in the art would
25 appreciate, this process of obtaining suitable drive
signals is not altered when the remote transducers are
not physically remote from the test system inputs
(e.g. the case where "remote" transducers are the
feedback variables, such as force or motion, of the
30 vibration system controller).

Although the above-described method for
modeling and obtaining drive signals for a vibration
system has enjoyed substantial success, there is a

continuing need to improve such systems. In
particular, there is a need to improve the system
model and/or the process for obtaining the drive
signals. Current techniques for obtaining the drive
5   signals subject the test specimen to loads and
displacements during the iterative process to
ascertain the drive signals. These initial loads and
displacements can damage the test specimen before the
intended testing occurs. Accordingly, a method and
10 system that reduces application of "non-testing" loads
and displacements in developing drive signals would be
desirable.

SUMMARY OF THE INVENTION

A method and system for generating an
15 improved nonlinear system model includes generating a
linear system model and using a response therefrom to
generate the nonlinear system model. In one
embodiment, the method includes applying an original
system input to the system and obtaining a first
20 system output from the system; generating a linear
system model; applying an alternative input to the
linear system model and obtaining a linear system
output from the linear system model; applying the
alternative input to the system and obtaining a second
25 system output, and generating a nonlinear system model
using the alternative input, the linear system output
from the linear system model and the second output
from the system.

A method and system for generating drive
30 signals for a test system uses the improved nonlinear
system model or a conventional nonlinear system model.
In a first exemplary embodiment, the method includes
applying a drive signal to the system; obtaining a

-4-

response of the system to the drive signal; generating an inverse nonlinear system model using the drive signal and the response; and calculating a final drive signal using a selected response and the inverse

5   nonlinear system model.

In a second embodiment for generating drive signals, the method includes applying a drive signal to the system; obtaining a response of the system to the drive signal; generating a nonlinear system model

10   using the drive signal and the response; generating an inverse linear system model; calculating a test drive signal using a selected response and the inverse linear system model; applying the test drive signal to the nonlinear system model; obtaining an actual

15   response of the nonlinear system model to the test drive signal; calculating an error as a function of the actual response and the selected response; and if the error exceeds a selected threshold, obtaining a new drive signal using the linear system model and

20   repeating the above-described steps where the test drive signal comprises the new drive signal until the error is less than or equal to the selected threshold.

BRIEF DESCRIPTION OF THE DRAWINGS

25   FIG. 1 is a block diagram of an exemplary environment for practicing the present invention.

FIG. 2 is a computer for implementing the present invention.

FIG. 3A is a flow chart illustrating the

30   steps involved in a system identification phase of a prior art method of vibration testing.

FIG. 3B is a flow chart illustrating the steps involved in an iterative phase of a prior art

method of vibration testing.

FIG. 3C is a flow chart illustrating the steps involved in another iterative phase of a prior art method of vibration testing.

FIG. 3D is a flow chart illustrating the steps involved in another iterative phase of vibration testing.

FIG. 4A is a detailed block diagram of a prior art iterative process for obtaining drive signals for a vibration system.

FIG. 4B is a detailed block diagram of another prior art iterative process for obtaining drive signals for a vibration system.

FIG. 4C is a detailed block diagram of another iterative process for obtaining drive signals for the vibration system.

FIG. 5 is a block diagram/flow chart of the prior art system identification/iterative process for obtaining drive signals for a vibration system.

FIG. 6 is a block diagram/flow chart of a system identification/iterative process for obtaining drive signals for a vibration system of the present invention.

FIG. 7 is a flow chart illustrating the steps involved in a system identification phase of an exemplary method for obtaining a nonlinear system model.

FIG. 8A is a detailed block diagram of a first iterative process for obtaining drive signals for a vibration system according to the present invention.

FIG. 8B is a detailed block diagram of a second iterative process for obtaining drive signals

for a vibration system of the present invention.

FIG. 8C is a detailed block diagram of a third iterative process for obtaining drive signals for a vibration system of the present invention.

FIG. 9 is a block diagram/flow chart of a fourth process for obtaining drive signals for a vibration system according to the present invention.

FIG. 10 is a portion of a flow chart illustrating a method in accordance with FIG. 9.

FIG. 11 is a block diagram of training a neural network structure for an inverse nonlinear model.

FIG. 12 is a block diagram of training a neural network structure for a forward nonlinear model.

FIG. 13 is a flow chart illustrating a method for generating an improved nonlinear system model.

FIG. 14 is a flow chart illustrating a second method for generating an improved nonlinear system model.

DETAILED DESCRIPTION OF THE ILLUSTRATIVE EMBODIMENTS

FIG. 1 illustrates a physical system 10. The physical system 10 generally includes a vibration system 13 comprising a servo controller 14 and an actuator 15. In the schematic illustration of FIG. 1, the actuator 15 represents one or more actuators that are coupled through a suitable mechanical interface 16 to a test specimen 18. The servo controller 14 provides an actuator command signal 19 to the actuator 15, which in turn, excites the test specimen 18. Suitable feedback 15A is provided from the actuator 15

to the servo controller 14. One or more remote transducers 20 on the test specimen 18, such as displacement sensors, strain gauges, accelerometers, or the like, provide a measured or actual response 21.

5   A physical system controller 23 receives the actual response 21 as feedback to compute a drive 17 as input to the physical system 10. In an iterative process discussed below, the physical system controller 23 generates the drive 17 for the physical system 10

10   based on the comparison of a desired response provided at 22 and the actual response 21 of the remote transducer 20 on the test specimen 18. Although illustrated in FIG. 1 for the single channel case, multiple channel embodiments with response 21

15   comprising N response components and the drive 17 comprising M drive components are typical and considered another embodiment of the present invention.

Although described herein where the physical

20   system comprises the vibration system 13 and remote transducer 20, aspects of the present invention described below can be applied to other physical systems. For instance, in a manufacturing process, the physical system includes the manufacturing machines

25   (e.g. presses, molding apparatus, forming machines, etc.) and the drive 17 provides command signals to said machines, and the actual response 21 comprises manual or automatic measured parameters of the manufactured article such as a critical dimension.

30   Another example includes an oil refinery where the physical system is the process plant and the actual response 21 comprises intermediate or final parameters related to output products.

-8-

FIG. 2 and the related discussion provide a brief, general description of a suitable computing environment in which the invention may be implemented. Although not required, the physical system controller 23 will be described, at least in part, in the general context of computer-executable instructions, such as program modules, being executed by a computer 30. Generally, program modules include routine programs, objects, components, data structures, etc., which perform particular tasks or implement particular abstract data types. The program modules are illustrated below using block diagrams and flowcharts. Those skilled in the art can implement the block diagrams and flowcharts to computer-executable instructions. Moreover, those skilled in the art will appreciate that the invention may be practiced with other computer system configurations, including multi-processor systems, networked personal computers, mini computers, main frame computers, and the like. The invention may also be practiced in distributed computing environments where tasks are performed by remote processing devices that are linked through a communications network. In a distributed computer environment, program modules may be located in both local and remote memory storage devices.

The computer 30 illustrated in FIG. 2 comprises a conventional personal or desktop computer having a central processing unit (CPU) 32, memory 34 and a system bus 36, which couples various system components, including the memory 34 to the CPU 32. The system bus 36 may be any of several types of bus structures including a memory bus or a memory controller, a peripheral bus, and a local bus using

any of a variety of bus architectures. The memory 34 includes read only memory (ROM) and random access memory (RAM). A basic input/output (BIOS) containing the basic routine that helps to transfer information

5   between elements within the computer 30, such as during start-up, is stored in ROM. Storage devices 38, such as a hard disk, a floppy disk drive, an optical disk drive, etc., are coupled to the system bus 36 and are used for storage of programs and data. It should

10 be appreciated by those skilled in the art that other types of computer readable media that are accessible by a computer, such as magnetic cassettes, flash memory cards, digital video disks, random access memories, read only memories, and the like, may also

15 be used as storage devices. Commonly, programs are loaded into memory 34 from at least one of the storage devices 38 with or without accompanying data.

An input device 40 such as a keyboard, pointing device (mouse), or the like, allows the user

20 to provide commands to the computer 30. A monitor 42 or other type of output device is further connected to the system bus 36 via a suitable interface and provides feedback to the user. The desired response 22 can be provided as an input to the computer 30 through

25 a communications link, such as a modem, or through the removable media of the storage devices 38. The drive signals 17 are provided to the physical system 10 of FIG. 1 based on program modules executed by the computer 30 and through a suitable interface 44

30 coupling the computer 30 to the vibration system 13. The interface 44 also receives the actual response 21.

Before describing the present invention, it may also be helpful to review, in detail, a known

-10-

method for modeling the physical system 10 and
obtaining the drive 17 to be applied thereto. Although
described below with respect to a test vehicle, it
should be understood that this prior art method and
5   the present invention discussed below are not confined
to testing only vehicles, but can be used on other
types of test specimens and substructures or
components thereof. In addition, the description is
done assuming spectral analysis based modeling
10   estimation and implementation though operations can be
carried by several other linear mathematical
techniques (e.g. Adaptive Filter Tuning or Adaptive
Inverse Control (AIC) type models, parametric
regression techniques such as Auto Regressive
15   Exogenous (ARX) and State Space types of models, or
combinations thereof).

        Referring to FIG. 3A, at step 52, the test
vehicle is instrumented with the remote transducers
20. At step 54, the vehicle is subjected to the field
20   operating environment of interest and the remote
transducer responses are measured and recorded. For
instance, the vehicle can be driven on a road or test
track. The measured remote transducer responses,
typically analog, are stored in the computer 30 in a
25   digital format through analog-to-digital converters,
as is commonly known.

        Next, in a system identification phase, the
input/output linear system model of the physical
system 10 is determined. With the vehicle mounted on
30   the laboratory test rig, this procedure includes
providing drive 17 as an input to the physical system
10 and measuring the remote transducer response 21 as
an output at step 56. The drive 17 used for linear

model estimation can be random "white noise" having frequency components over a selected bandwidth. At step 58, an estimate of the linear model of the physical system 10 is calculated based on the input drive applied and the remote transducer response obtained at step 56. In one embodiment, this is commonly known as the "frequency response function" (FRF). Mathematically, the FRF is a N x M matrix wherein each element is a frequency dependent complex variable (gain and phase versus frequency). The columns of the matrix correspond to the inputs, while the rows correspond to the outputs. As appreciated by those skilled in the art, the FRF may also be obtained directly from prior tests using the physical system 10 or other systems substantially similar to the physical system 10

An inverse linear model $H(f)^{-1}$ is needed to determine the physical drive 17 as a function of the remote responses at step 60. As appreciated by those skilled in the art, the inverse linear model can be calculated directly. Also, the term "inverse" model as used herein includes a M x N "pseudo-inverse" model for a non-square N x M system.

At this point in the prior art, the method enters an iterative phase, illustrated in FIGS. 3B and 4A, to obtain drive 17 which produces actual response 21 that ideally replicates the desired remote transducer response 22 (hereinafter "desired response"). The inverse physical system linear model $H(f)^{-1}$ is represented at 72, while physical system (vibration system, test vehicle, remote transducers and instrumentation) is represented at 10. Referring to FIG. 3B, at step 78, the inverse linear model 72 is

-12-

applied to a target response correction 77 in order to determine an initial drive 17 $x_1(t)$. The target response correction 77 can be the desired response 22 for the initial drive, though most often it is reduced by a relaxation gain factor 95. The calculated drive 17 $x_1(t)$ from the inverse linear model 72 is then applied to the physical system 10 at step 80. The actual remote transducer response 21 (hereinafter "actual response") $y_1(t)$ of the physical system 10 to the applied drive 17 $x_1(t)$ is then obtained at step 86. If the complete physical system 10 is linear (allowing a relaxation gain 95 of unity), then the initial drive 17 $x_1(t)$ could be used as the required drive. However, since physical systems are typically nonlinear, the correct drive 17 has to be arrived at by an iterative process. (As appreciated by those skilled in the art, drive 17 used in previous tests for a similar physical system may be used as the initial drive.)

The iterative process involves recording the first actual response $y_1(t)$ resulting from the initial drive $x_1(t)$ and comparing it with the desired response 22 and calculating a response error 89 Δy_1 as the difference at step 88. (The first actual response signal $y_1(t)$ is provided at 87 in FIG. 4A.) The response error 89 Δy_1 is compared to a preselected threshold at step 90 and if the response error 89 exceeds the threshold an iteration is performed. Specifically the response error 89 Δy_1 is reduced by the relaxation gain factor 95 to provide the new target response correction 77. In this embodiment, the inverse transfer function $H(f)^{-1}$ is applied to the new target response correction 77 to create a drive

correction Δx_2 94 (step 91) that is added to the first drive $x_1(t)$ 17A to give a second drive $x_2(t)$ 17 at step 92. The iteration process (steps 80-92) is repeated until the response error 89 is brought down below the preselected threshold on all channels of the response. The last drive 17, which produced a response 21, that was within the predetermined threshold of the desired response 22, can then be used to perform specimen testing.

As described, the response error 89 Δy is commonly reduced by the relaxation gain factor (or iteration gain) 95 to form the target response correction 77. The iteration gain 95 stabilizes the iterative process and trades off rate-of-convergence against iteration overshoot. Furthermore, the iteration gain 95 minimizes the possibility that the test vehicle will be overloaded during the iteration process due to nonlinearities present in the physical system 10. As appreciated by those skilled in the art, an iteration gain can be applied to the drive correction 94 Δx and/or the response error 89. It should be noted in FIG. 4A that storage devices 38 can be used to store the desired response 22, the actual responses 21 and previous drives 17A during the iterative process. Of course, memory 34 can also be used. Also, a dashed line 93 indicates that the inverse linear model 72 is an estimate of the inverse of the physical system 10. The block diagram of FIG. 4A, as discussed above, can be implemented by those skilled in the art using commercially available software modules such as included with RPCIII™ from MTS Systems Corporation of Eden Prairie, Minnesota.

-14-

At this point, a modified method of the
prior art for calculating the drive can also be
discussed. The modified prior art method includes the
steps of the identification phase illustrated in FIG.
3A and many of the steps of the iterative phase
illustrated in FIG. 3B. For convenience, the iterative
steps of the modified method are illustrated in FIG.
3C and the block diagram is illustrated in FIG. 4B. As
illustrated in FIG. 4B, the calculation of the target
response correction 77 is identical. However, if the
response error 89 between the actual response 21 and
the desired response 22 is greater than a selected
threshold, then the target response correction 77 is
added to a previous target response 79A at step 97 to
obtain a new target response 79 for the current
iteration. The inverse linear model 72 is applied to
the target response 79 to obtain the new drive 17. As
illustrated in FIG. 4B, the iteration gain 95 can be
used for the reasons discussed above.

A further iterative method for calculating
the drive is illustrated in FIGS. 3D and 4C. As
illustrated in FIG. 4C, a linear drive 96 is obtained
by applying the inverse linear model 72 to the desired
response 22. The linear drive 96 is used as a
reference for comparison similar to how the desired
response 22 was used in the methods described above.
Accordingly, the inverse linear model 72 is applied to
the actual response 21 to obtain a drive estimate 98
(step 101). If a drive error 99 between the drive
estimate 98 and the linear drive 96 is greater than a
selected threshold (step 103), then the drive
correction 94 is added to a previous drive 17A at step
105 to obtain a new drive 17 for the current

iteration. As illustrated in FIG. 4B, the iteration gain 95 can be used for the reasons discussed above.

FIG. 5 is another block diagram flow chart illustrating the prior art technique of obtaining the drive signal for the system 10. In FIG. 5, like reference numbers have been used to identify similar elements as discussed above. " System identification" as described above with respect to FIG. 3A is shown generally at 100, while the iterative phase, described with respect to FIGS. 3B and 4A is illustrated generally at 102. The iterative phase 102 sequentially corrects the drive signal 17 and applies it to the system 10 until the response error 89 is within the predetermined threshold of the desired response 22. The final iterated drive signal is obtained at 104. Of course, a similar iterative phase corresponding to FIGS. 3C, 3D, 4B and 4C could also have been used to generate the final iterated drive signal 104.

Using the format of FIG. 5, a first aspect of the present invention is illustrated in FIG. 6. Generally, FIG. 6 illustrates a method 120 to control the system 10 to produce a selected response, and in particular, to generate a suitable drive signal to produce the selected response. The method 120 includes obtaining a nonlinear model 122 of the system 10 in a system identification 123 and using the nonlinear model 122, rather than the system 10, during an iterative phase 124 (executed within system controller 23 of FIG. 1) to calculate or generate the final drive signal 104 intended to produce the desired response 22.

An exemplary method of system identification 123 is illustrated in FIG. 7, which includes steps 52-

60 as discussed above wherein an inverse linear system model 72 (e.g: inverse FRF) is obtained. System identification 123 however, also includes a step 126 that comprises calculating or generating the nonlinear system model 122. In general, the nonlinear system model 122 comprises a tapped delay line or structure 123 and at least one nonlinear regression structure 125A. The tapped delay line 123 comprises a set of series connected delay elements 127 that provide a set of delayed inputs for each input drive signal (commonly digital values obtained at a selected sampling frequency). In FIG. 6, one input drive signal 129 is illustrated although in many applications a plurality of individual drive signals are present, each drive signal being delayed by a corresponding tapped delay line to yield a corresponding set of delayed inputs. Typically, a nonlinear regression structure is provided for each output from the nonlinear model 122. In the embodiment illustrated, two regression structures 125A and 125B are shown and provide nonlinear model outputs 131A and 131B, respectively, but it should be understood that any number of nonlinear model outputs can be present. Likewise, although three delay elements 127 are shown any number of delay elements 127 can be used for each drive signal.

In one embodiment, the nonlinear regression structure 125A and 125B each comprises a neural network. Regression structures 125A and 125B are means for regression modeling. In place of the neural network other forms of regression structures (or means for regression modeling) such as " nearest neighbors" , "support vector machines", "projection pursuit",

-17-

"multiple adaptive regression spines", "hinging hyperplanes", "radial basis functions" "constrained topological mapping", etc. can also be used. Calculation of nonlinear regression models is well

5   known in the art. For instance, software programs such as MATLAB, Neural Network Toolbox available from The Mathworks, Inc. of Natick, Massachusetts can be used to calculate a neural network based on the random drive and response of the system 10 to the drive

10   obtained at step 56 in FIG. 7.

Of course other drive signals besides a random drive can be applied to the system 10 used to calculate the inverse linear model 72 and/or the nonlinear system model 122. For instance, synthetic

15   random signals having a prescribed power spectrum can be used. Random signals obtained from previous tests on the same or similar test system can also be used. Random signals obtained by use of preliminary system models (i.e. analytic/computer models or equations

20   representing the dynamics of the test system) can also be used. Furthermore, multiple channel random input signals may be statistically correlated or uncorrelated (i.e. " orthogonal").

It should also be noted that the nonlinear

25   model 122 need not correspond to the system 10 for which drive signals are ultimately intended. In other words, the nonlinear model 122 may be generated using drive and response signals from test system A, wherein the nonlinear model 122 may be then used to generate

30   drive signals for test system B, which differs from test system A in specimen, test rig, or both. However, the greater the similarity between test systems A and B, the better the results, in general.

-18-

The nonlinear system model 122 is a " forward
model" that models the system 10. The nonlinear system
model 122 is then used during the iterative phase 124,
rather than the system 10, to iterate to the drive
5   signal which realizes a response within a
predetermined threshold of the desired response 22.
FIG. 8A illustrates in block diagram form, the
iterative phase 124 wherein a response error 89 and
drive corrections 94 are used during the iterative
10 process. If desired, the iterative phase 124 can be of
the form where the response error 89 and target
response corrections 77 are used, which is illustrated
in FIG. 8B. Likewise, the iterative phase 124 can be
of the form where the drive error 99 and drive
15 corrections 94 are used, as illustrated in FIG. 8C.

Referring back to FIG. 6, in many cases, the
final drive 104 obtained at the end of the iterative
phase 124 is sufficiently accurate to obtain
substantially the desired response 22 when applied to
20 the system 10. However, if desired, conventional
iteration can be performed as described above with
respect to FIGS. 3B, 3C, 3D, 4A, 4B and 4C, which is
generally illustrated at 130, to further refine the
final drive signal 104. Likewise, if desired, the
25 nonlinear system model 122 can be modified by further
training, followed by more model iterations.

As appreciated by those skilled in the art,
the inventive method described above substantially
reduces the number of drive signals applied to the
30 system 10 in order to obtain the appropriate drive
signal to generate the desired response 22.
Accordingly, wear and/or possible damage to the system
10 is substantially reduced.

It should be noted that the inverse linear system model 72 can be obtained using any of the following techniques. As illustrated in FIGS. 6 and 7, a forward linear model can be calculated using the same drive and response as those used for calculating the nonlinear system model 122, followed by inversion using conventional techniques.

Alternatively, the inverse linear system model 72 can also be obtained by re-identification of the forward linear model, wherein a prescribed drive signal is applied to the nonlinear system model 122, obtaining the subsequent response, and then calculating the forward linear model by conventional techniques. The forward linear model can then be inverted using conventional techniques. This approach offers the possibility of using a drive signal with characteristics different than those used for the nonlinear system model.

In yet another method, direct calculation of the forward linear model can be obtained by linearization of the nonlinear model equations, followed by conventional inversion.

The inverse linear model 72 can also be obtained directly without first calculating the forward linear model. For instance, calculation of the inverse linear model 72 can be performed directly using the same drive and response as those used for the nonlinear system model 122. In addition, the inverse linear model 72 can be re-identified by playing a prescribed drive signal into the nonlinear system model 122 and obtaining the subsequent response. The inverse linear model 72 can then be obtained by conventional techniques. Again, this

-20-

approach offers the possibility of using a drive
signal with characteristics different than those used
for obtaining the nonlinear system model 122, which
may be desirable for some desired responses. Also, the
5 inverse linear model 72 can be directly calculated by
linearization of equations in an inverted nonlinear
system model.

The inverse linear model 72 described with
respect to the method of FIG. 6 was static (i.e. non-
10 changing values). However, adjustments to the inverse
linear model 72 can also be made during the iteration
phase as described in co-pending application Serial
No. 09/234,998, entitled, " METHOD AND APPARATUS FOR
GENERATING DRIVE SIGNALS IN A VIBRATION TEST SYSTEM" ,
15 filed January 21, 1999, and incorporated herein by
reference in its entirety.

A second and separate aspect of the present
invention is illustrated in FIGS 9 and 10 and also is
a method 140 of controlling a test system responsive
20 to a drive signal to produce a selected response.
Referring to FIGS. 9 and 10, the method 140 includes a
system identification process 144 (FIG. 9) wherein a
test drive signal 142 (FIG. 9) is applied to the
system 10 at step 150 (FIG. 10). A subsequent response
25 148 of the system 10 to the test drive signal 142 is
then obtained at step 152. Using the test drive signal
142 and subsequent response 148, an inverse nonlinear
system model 154 (similar in structure to nonlinear
model 122) is calculated at step 156. By applying the
30 selected or desired response 22 to the inverse
nonlinear system model 154, a final drive signal 158
is calculated. In view that the inverse nonlinear
system model 154 was calculated and used to obtain the

-21-

final drive signal 158, the model 154 more accurately
models the system 10 than that which was obtainable
from the linear system models, discussed above. In
many cases, the final drive signal 158 is sufficiently
5   accurate so that further iterations need not be
necessary. However, if desired, iterative refinement
of the drive signal 158 can be calculated using the
inverse nonlinear system model 154 in a manner similar
to that discussed above.

10   It should also be noted that iterative
processing can take the form of any of the techniques
discussed above, with respect to FIGS. 3B, 3C, 3D, 4A,
4B and 4C. Specifically, drive corrections can be
obtained from the inverse nonlinear system model or
15 from the inverse linear model as used in the prior
art. Alternatively, target response corrections can be
applied to the inverse linear system model 154 wherein
the new drive signal is obtained therefrom.

    In many instances, the desired response 22
20 is prerecorded so the final drive 158 can be
calculated by application of the inverse nonlinear
system model 154 to the desired response 22 without
regard to how long processing might take. The final
drive 158 can then be stored and applied to the system
25 10 as desired. However, in another embodiment, the
nonlinear system model 154 can be suitably stored and
accessed by a controller (e.g. computer or digital
signal processor) for real time processing. In this
manner, the desired response 22 can be an input to the
30 controller wherein the controller calculates the drive
for the system 10 using the nonlinear system model 154
on a real time basis in order that the system 10
subsequently produces the desired response as the

-22-

actual response. This allows testing of the test specimen without first recording a desired response.

As indicated above, the nonlinear system model 122 and the inverse nonlinear system model 158
5 can be generated using a number of nonlinear modeling techniques. One particularly useful technique is a neural network.

FIG. 11 illustrates training of a neural network structure 160 for an inverse model. For
10 purposes of simplification, a single input/single output embodiment is illustrated. A physical system response 162 is provided to a tapped delay line 164 having a series of connected delay elements 166 that provide a plurality of delayed model inputs 168 to the
15 neural network structure 160. A physical system drive 172 is used as the model output. If desired, the output 172 can be provided to a tapped delay line 174 having the series connected delay elements 166 to form a plurality of additional delayed model inputs 178 to
20 the neural network structure 160. As appreciated by those skilled in the art, the number of delay elements 166 present in the tapped delay line 164 and the tapped delay line 174 can be chosen independently. The neural network structure 160 is a well-known
25 multilayer perceptron network type wherein the number of hidden layers, the number of neurons in each hidden layer, and the number of inputs and the number of outputs can be chosen independently. In addition, the form of the activation functions present in the neural
30 network structure 160 can take well-known forms such as hyperbolic tangent and logistic sigmoid, to name a few.

In the embodiment illustrated in FIG. 11, an

-23-

inverse neural network model is created wherein the model input comprises a physical system response and the model output comprises a physical system drive. Forward neural network models such as used in the

5   embodiment described above with respect to FIG. 6 can be similarly developed. FIG. 12 illustrates training of a forward neural network model wherein the input 162 comprises the physical system drive and the output 172 comprises the physical system response.

10   As discussed above, multiple input/multiple output models can be created. Typically, a nonlinear system model, such as the neural network structure 160, is formed for a multiple input/single output application wherein a complete neural network model

15   having multiple outputs is formed from a plurality of neural network structures, each providing a separate output as a function of a plurality of inputs.

           Although known methods for generating nonlinear models, such as generation of a neural

20   network model as described above can be used in the aspects of the present invention discussed above, an improved method for nonlinear model generation is illustrated in FIG. 13. However, it should be understood that the method of FIG. 13 is not confined

25   to use in modeling a vibration system in order to obtain suitable drive signals intended to produce a desired response, but rather, can be used to generate a nonlinear model of any physical system (e.g. a manufacturing process, a complex machine, a component

30   such as a shock absorber, etc.) comprising one or more inputs and one or more outputs. Accordingly, the method of FIG. 13 constitutes a third and separate broad aspect of the present invention.

-24-

In FIG. 13, a physical system 200 receives one or more original system input signals at 202 and provides one or more first system output signals 204. The improved method of nonlinear model generation includes using the original system input signals 202 and the first system output signals 204 in a conventional linear model generation process 205, such as a FRF model generation process to generate a linear system model 210 (in either a forward or inverse model application).

An alternative input signal(s) 209 is then applied to the linear system models 210 and a linear output prediction 212 (corresponding generally to the first output system signal(s) 204) is obtained therefrom. The alternative input signal(s) 209 is also applied to the physical system 200 and a second system output signal 211 is obtained. The alternative input signal(s) 209, the second system output signal 211 and the corresponding linear output prediction 212 are then used in a nonlinear model generation process 213 (e.g. neural network modeling as discussed above) to generate a nonlinear system model 216 (in either a forward or inverse model application). Unlike conventional nonlinear modeling generation, which forms a nonlinear system model as a function of only the alternative input signal(s) 209 and the second output signal 211, the nonlinear system model 216 obtained is also a function of the corresponding linear response prediction 212. If the input signal(s) 202 is subsequently applied to the nonlinear system model 216, a nonlinear response prediction 218 accurately resembles the output signal 204, thereby verifying that the nonlinear system model 216

-25-

accurately models the physical system 200.

In the embodiment illustrated, the separate input signals 202 and 209 have been used to generate the linear system model 210 and the inverse linear
5   system model 216; however, as appreciated by those skilled in the art, the same input signals can be used This method is illustrated in FIG. 14.

Although the present invention has been described with reference to preferred embodiments,
10 workers skilled in the art will recognize that changes may be made in form and detail without departing from the spirit and scope of the invention.

Claims

5

10

15

20

25

30

35

40

45

50

55

-26-

WHAT IS CLAIMED IS:

1.   A method of controlling a test system responsive to a drive signal to produce a selected response, the method comprising:

(a) applying a drive signal to the system;

(b) obtaining a response of the system to the drive signal;

(c) generating a nonlinear system model using the drive signal and the response;

(d) generating an inverse linear system model;

(e) calculating a test drive signal using the selected response and the inverse linear system model;

(f) applying the test drive signal to the nonlinear system model;

(g) obtaining an actual response of the nonlinear system model to the test drive signal;

(h) calculating an error as a function of the actual response and the selected response; and

if the error exceeds a selected threshold:

(i) obtaining a new drive signal ; and

(j) repeating steps (f) through (i) wherein the test drive signal is the new drive signal until the error is less than or equal to the selected threshold.

2.   The method of claim 1 wherein obtaining a new drive comprises:

-27-

calculating a target response correction;
calculating a drive correction using the
    inverse linear system model; and
combining the drive correction with a
    previous test drive signal to obtain a
    new test drive signal.

3.   The method of claim 1 wherein obtaining a
new drive comprises:
calculating a target response correction;
combining the target response correction
    with a previous target response; and
using the inverse linear system model to
    obtain the new drive.

4.   The method of claim 1 wherein generating the
inverse linear system model comprises:
generating a forward linear system model
    using the drive signal of step (a) and
    the response signal of step (b); and
calculating the inverse linear system model
    from the forward linear system model.

5.   The method of claim 1 wherein generating the
inverse linear system model comprises:
applying a selected drive signal to the
    nonlinear system model;
obtaining a resultant response signal from
    the nonlinear system model;
generating a forward linear system model
    using the selected drive signal and the
    resultant response signal; and
calculating the inverse linear system model

-28-

from the forward linear system model.

6.   The method of claim 1 wherein generating the
inverse linear system model comprises:
        linearizing   equations   of   the   nonlinear
                system model to obtain a forward linear
                system model; and
        calculating the inverse linear system model
                from the forward linear system model.

7.   The method of claim 1 wherein generating the
inverse linear system model comprises:
        generating the inverse linear system model
                using the drive signal of step (a) and
                the response signal of step (b).

8.   The method of claim 1 wherein generating the
inverse linear system model comprises:
        applying   a   selected   drive   signal   to   the
                nonlinear system model;
        obtaining a resultant response signal from
                the nonlinear system model; and
        generating the inverse linear system model
                using the selected drive signal and the
                resultant response signal.

9.   The method of claim 1 wherein generating the
inverse linear system model comprises:
        linearizing   equations   of   the   inverse
                nonlinear system model to obtain the
                inverse linear system model.

10.   The   method   of   claim   1   and   further

-29-

comprising:

        calculating a linear system model and a
            response from the linear system model;
            and

        wherein generating the inverse nonlinear
            system includes using the response from
            the linear system model.

11.   The method of claim 10 wherein obtaining the response from the linear system model includes applying an alternative input signal different than the first-mentioned drive signal.

12.   A method of controlling a test system responsive to a drive signal to produce a selected response, the method comprising:

        (a) applying a drive signal to the system;
        (b) obtaining a response of the system to
            the drive signal;
        (c) generating an inverse nonlinear system
            model using the drive signal and the
            response; and
        (d) calculating a final drive signal using
            the selected response and the inverse
            nonlinear system model.

13.   The method of claim 12 wherein generating the inverse nonlinear system model includes:

        training a neural network using the drive
            signal and the response.

14.   The method of claim 12 and further comprising:

calculating a linear system model and a
response from the linear system model;
and
wherein generating the inverse nonlinear
system includes using the response from
the linear system model.

15.   The method of claim 14 wherein obtaining the
response from the linear system model includes
applying an alternative input signal different than
the first-mentioned drive signal.

16.   The method of claim 15 wherein the selected
drive signal corresponds to the first-mentioned drive
signal.

17.   The method of claim 15 wherein the selected
drive signal does not correspond to the first-
mentioned drive signal, and wherein generating the
inverse nonlinear system model includes using the
selected drive.

18.   A method of obtaining a non-linear system
model of a system, the method comprising:
        (a) applying an original input to the system
            and obtaining a first system output
            from the system;
        (b) generating a linear system model using
            the original input and the first system
            output;
        (c) applying an alternative input to the
            linear system model and obtaining a
            linear system output from the linear

-31-

system model; and

(d)   applying the alternative input to the system and obtaining a second system output from the system;

(e)   generating a nonlinear system model using the alternative input, the second system output from the system and the linear system output from the linear system model.

19.   The method of claim 18 wherein the original input and the alternative input are the same.

20.   The method of claim 18 wherein the nonlinear system model comprises a forward nonlinear system model and wherein the inputs comprise drives and the outputs comprise responses.

21.   The method of claim 18 wherein the nonlinear system model comprises an inverse nonlinear system model and wherein the inputs comprise responses and the outputs comprise drives.

22.   A vibration system for testing a test specimen, the vibration system comprising:

an actuator system couplable to the test specimen;

a servo controller coupled to operate the actuator system;

a system controller providing a drive signal to the servo controller, the system controller having means for generating, storing and using a nonlinear system model to generate

-32-

drive signals that when applied to the servo
controller cause a desired response from the
test specimen.

23. The vibration system of claim 22 wherein the
nonlinear system model comprises a forward nonlinear
system model.

24. The vibration system of claim 23 wherein the
means for generating, storing and using the forward
nonlinear system model to generate the drive signal
comprises means for iteratively applying drive signals
to the forward nonlinear system model.

25. The vibration system of claim 22 wherein the
nonlinear system model comprises an inverse nonlinear
system model.

26.   The vibration system of claim 22 wherein the
nonlinear system model comprises a regression
structure and a tapped delay line providing a set of
inputs to the regression structure.

27.   A computer readable medium including
instructions readable by a computer, which when
implemented, cause the computer to control a physical
system responsive to a drive signal to produce a
selected response, the instructions performing steps
comprising:
          (a) applying a drive signal to the system;
          (b) obtaining a response of the system to
              the drive signal;

-33-

(c) generating a nonlinear system model using the drive signal and the response;

(d) generating an inverse linear system model;

(e) calculating a test drive signal using the selected response and the inverse linear system model;

(f) applying the test drive signal to the nonlinear system model;

(g) obtaining an actual response of the nonlinear system ¯model to the test drive signal;

(h) calculating an error as a function of the actual response and the selected response; and

if the error exceeds a selected threshold:

(i) obtaining a new drive signal; and

(j) repeating steps (f) through (i) wherein the test drive signal is the new drive signal until the error is less than or equal to the selected threshold.

28.   The computer readable medium of claim 27 and further comprising instructions for:

calculating a linear system model and a response from the linear system model; and

wherein generating the inverse nonlinear system includes using the response from the linear system model.

-34-

29.   The computer readable medium of claim 28
wherein obtaining the response from the linear system
model includes applying an alternative input signal
different than the first-mentioned drive signal.

30.   A   computer   readable   medium   including
instructions   readable   by   a   computer,   which   when
implemented, cause the computer to control a physical
system responsive to a drive signal to produce a
selected response, the instructions performing steps
comprising:

      (a) applying a drive signal to the system;

      (b) obtaining a response of the system to
          the drive signal;

      (c) generating an inverse nonlinear system
          model using the drive signal and the
          response; and

      (d) calculating a final drive signal using
          the selected response and the inverse
          nonlinear system model.

31.   The computer readable medium of claim 30 and
further comprising instructions for:

      calculating a linear system model and a
          response from the linear system model;
          and

      wherein generating the inverse nonlinear
          system includes using the response from
          the linear system model.

32.   The computer readable medium of claim 31
wherein obtaining the response from the linear system
model includes applying an alternative input signal

-35-

different than the first-mentioned drive signal.

33.   A   computer   readable   medium   including instructions   readable   by   a   computer,   which   when implemented, cause the computer to obtain a non-linear system model of a system, the instructions performing steps comprising:

    (a) applying an original input to the system and obtaining a first system output from the system;

    (b) generating a linear system model using the original input and the first system output;

    (c) applying an alternative input to the linear system model and obtaining a linear system output from the linear system model; and

    (d) applying the alternative input to the system and obtaining a second system output from the system;

    (e) generating a nonlinear system model using the alternative input, the second system output from the system and the linear system output from the linear system model.

34.   The computer readable medium of claim 33 wherein the original input and the alternative input are the same.

35.   The computer readable medium of claim 33 wherein the nonlinear system model comprises a forward nonlinear system model and wherein the inputs comprise

-36-

drives and the outputs comprise responses.

36.   The computer readable medium of claim 33 wherein the nonlinear system model comprises an inverse nonlinear system model and wherein the inputs comprise responses and the
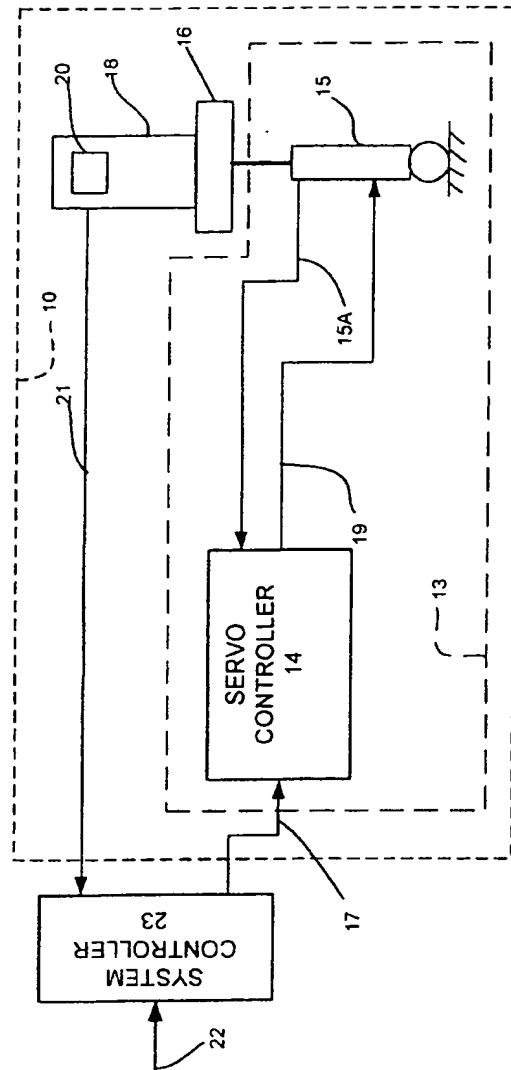
1/21

FIG.1

FIG.2

3/21

INSTRUMENT
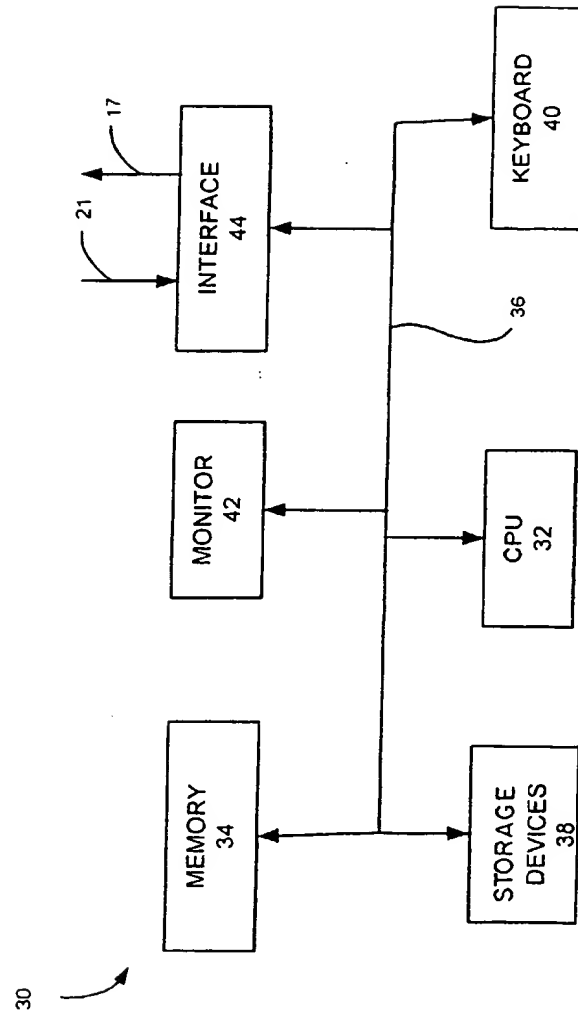VEHICLE
52

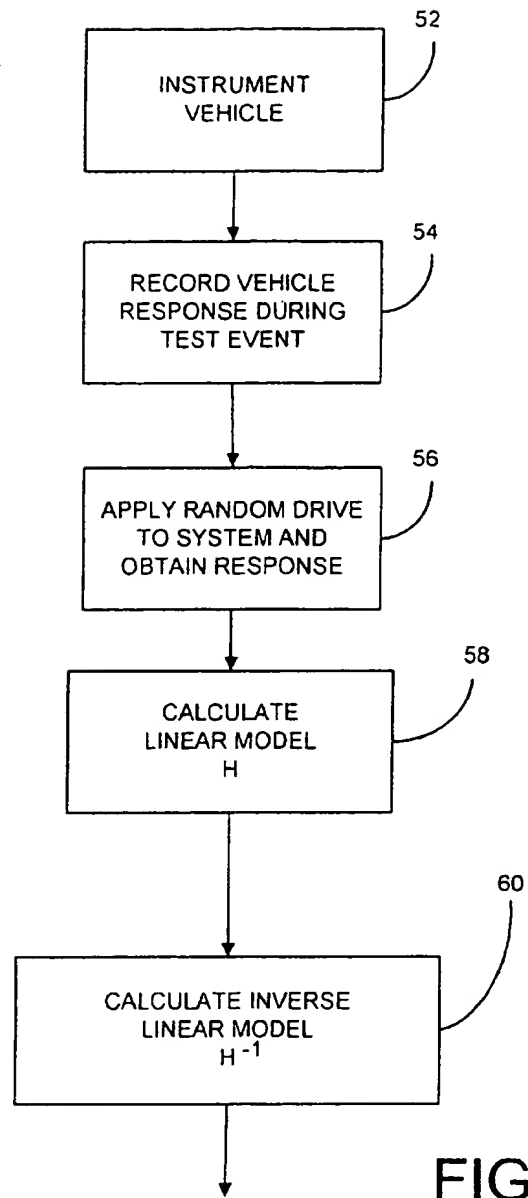RECORD VEHICLE
RESPONSE DURING
TEST EVENT
54

APPLY RANDOM DRIVE
TO SYSTEM AND
OBTAIN RESPONSE
56

CALCULATE
LINEAR MODEL
H
58

CALCULATE INVERSE
LINEAR MODEL
H^{-1}
60

FIG. 3B
OR
FIG. 3C

FIG. 3A
PRIOR ART

4/21

OBTAIN FIRST DRIVE
(X_1) 78

ADD DRIVE CORRECTION
TO PREVIOUS DRIVE
(X_{i-1}) 92

APPLY DRIVE (X_i) TO
PHYSICAL SYSTEM   80

OBTAIN ACTUAL
RESPONSE (Y_i) 86

CALCULATE RESPONSE
ERROR BETWEEN ACTUAL
RESPONSE AND DESIRED
RESPONSE   88

CALCULATE DRIVE
CORRECTION USING H^{-1} 91

IS RESPONSE ERROR
GREATER THAN A
SELECTED THRESHOLD?   90

YES   NO

BEGIN TESTING
USING LAST
DRIVE

FIG. 3B
PRIOR ART

5/21

OBTAIN FIRST DRIVE
(X_1) 78

APPLY DRIVE (X_i) TO
PHYSICAL SYSTEM   80

CALCULATE NEW DRIVE
USING H^{-1} 99

OBTAIN ACTUAL
RESPONSE (Y_i) 86

CALCULATE RESPONSE
ERROR BETWEEN ACTUAL
RESPONSE AND DESIRED
RESPONSE   88

ADD TARGET RESPONSE
CORRECTION TO
PREVIOUS TARGET (Y_{i-1}) 97

IS RESPONSE ERROR
GREATER THAN A
SELECTED THRESHOLD?   90

YES   NO

BEGIN TESTING
USING LAST
DRIVE

FIG. 3C
PRIOR ART

FIG. 3D
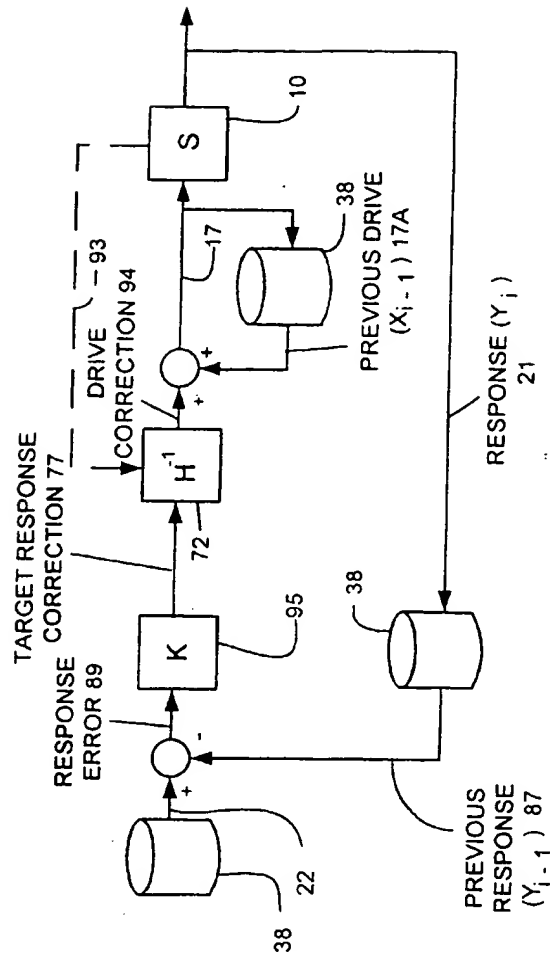
FIG.4A

PRIOR ART

8/21

FIG.4B

PRIOR ART
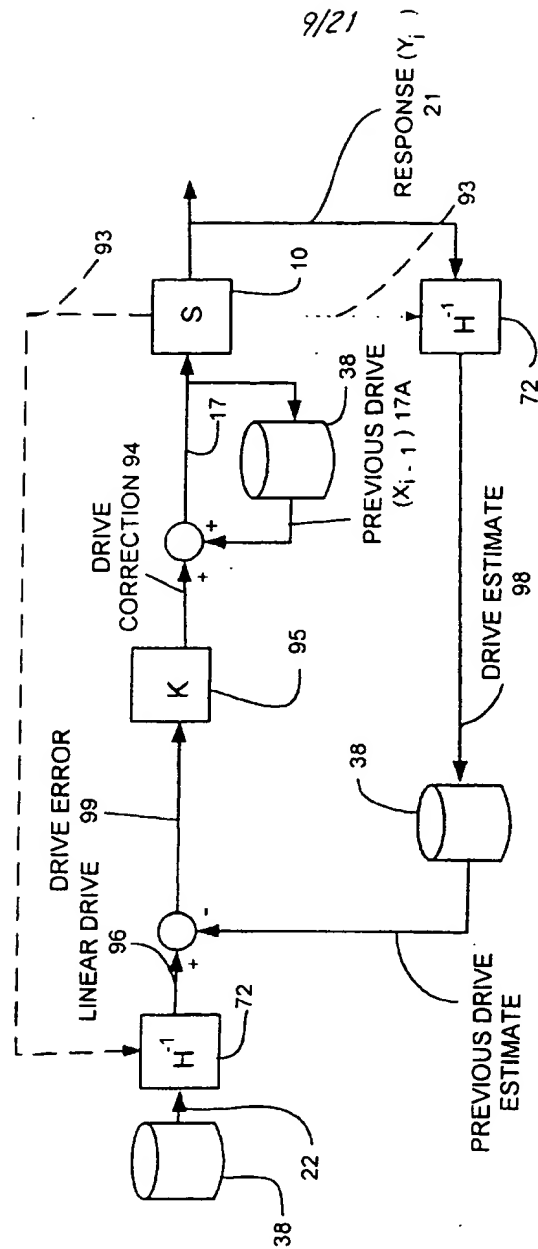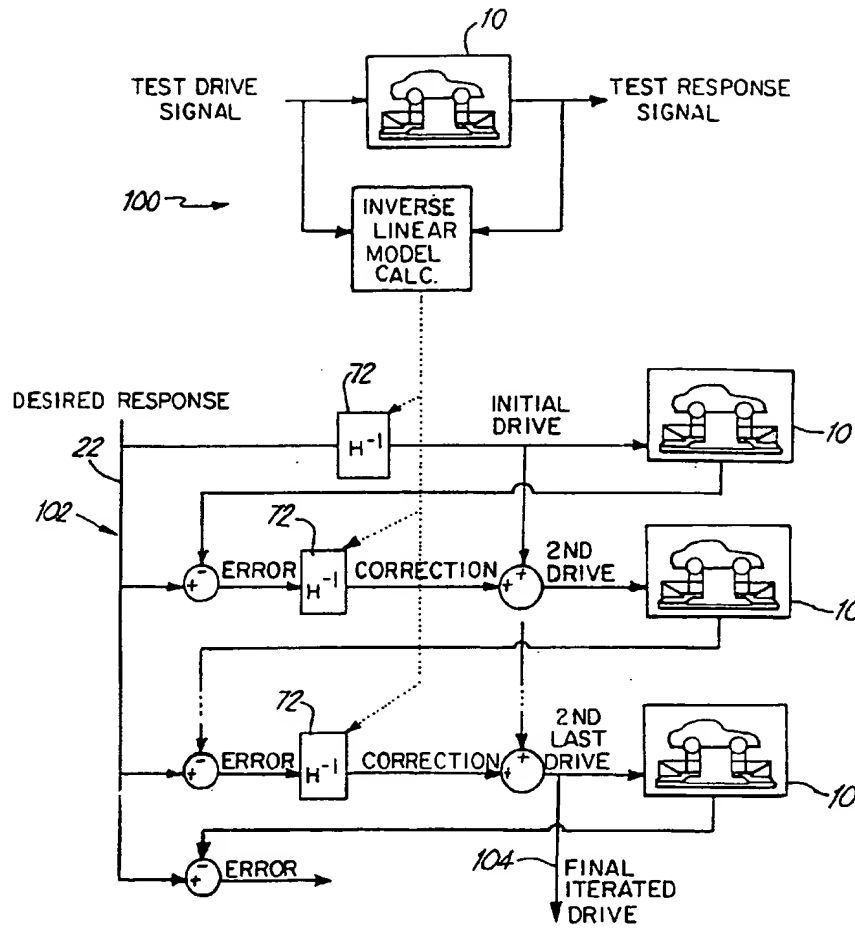
9/21

FIG. 4C

FIG. 5
PRIOR ART

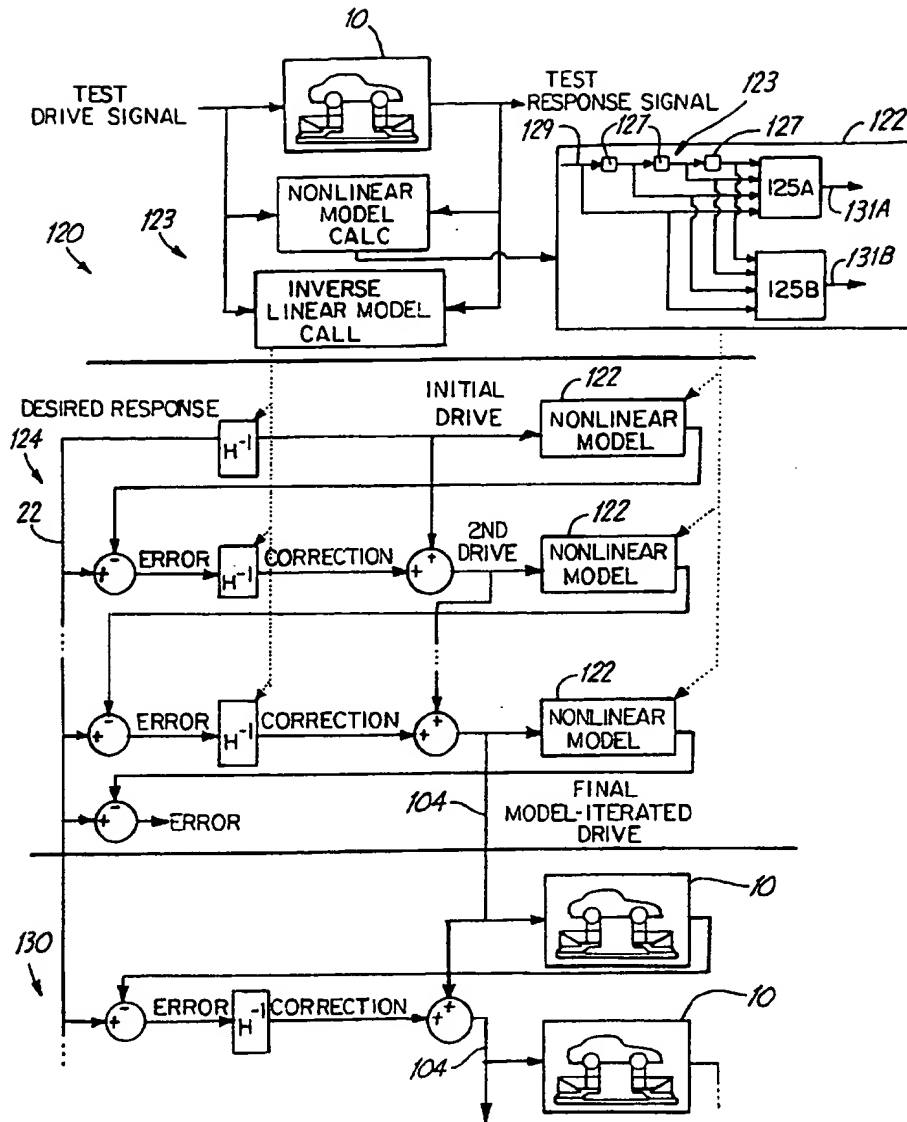11/21

FIG. 6
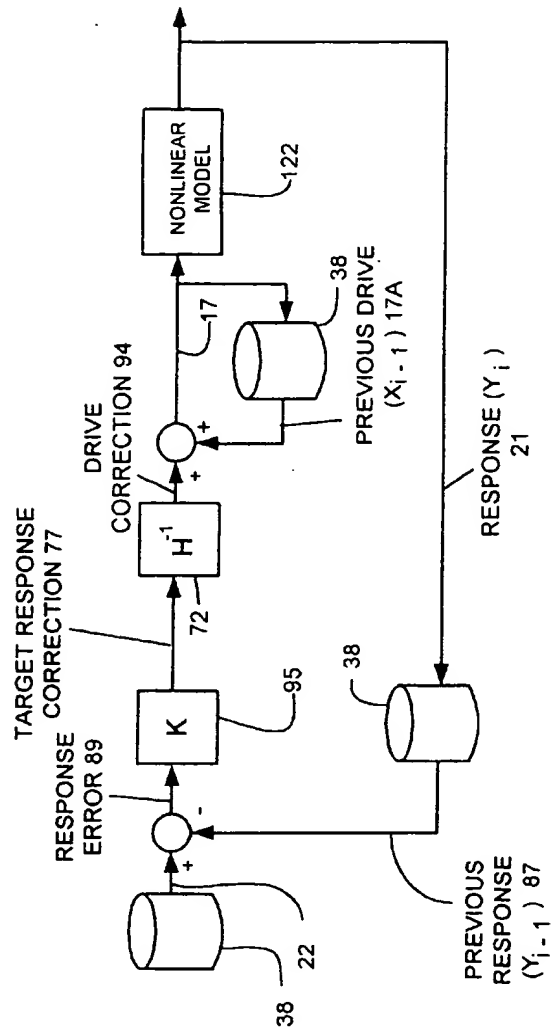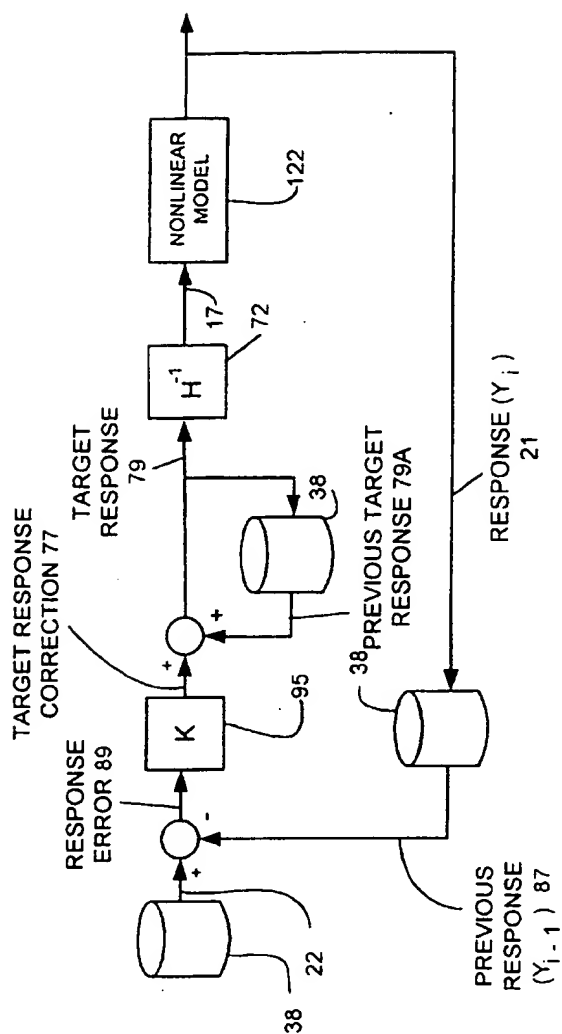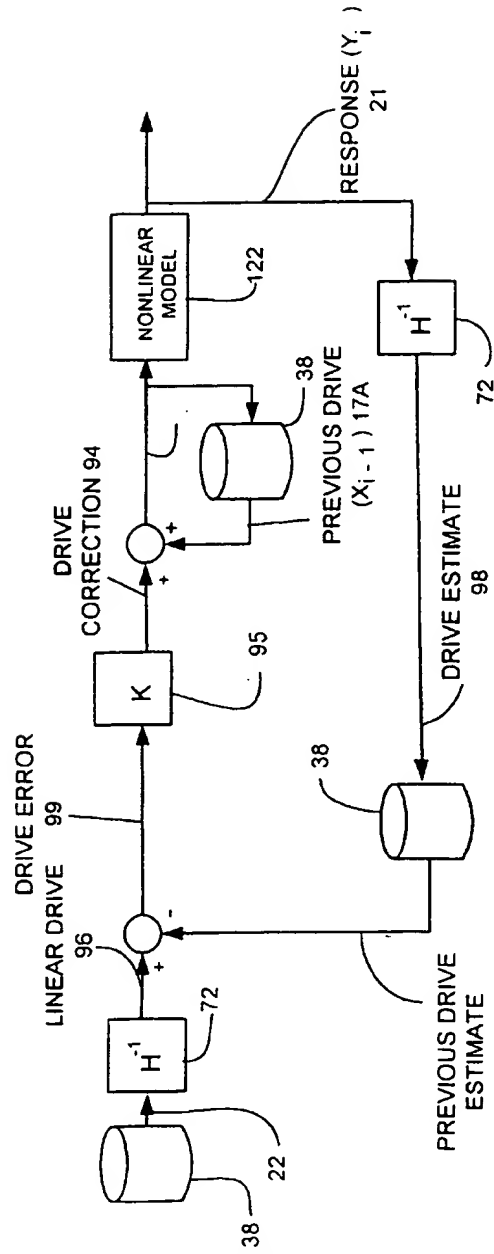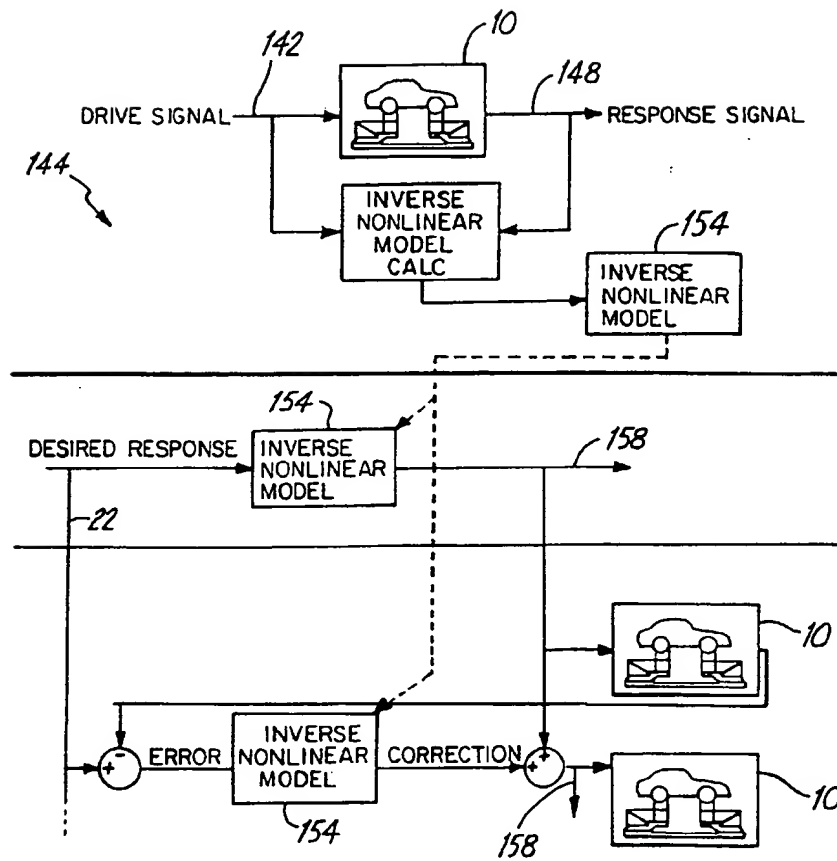
12/21

123

```
        ┌─────────────────┐  52
        │   INSTRUMENT    │
        │    VEHICLE      │
        └─────────────────┘
                 │
                 ▼
        ┌─────────────────┐  54
        │ RECORD VEHICLE  │
        │ RESPONSE DURING │
        │   TEST EVENT    │
        └─────────────────┘
                 │
                 ▼
        ┌─────────────────┐  56
        │ APPLY RANDOM DRIVE │
        │  TO SYSTEM AND  │
        │ OBTAIN RESPONSE │
        └─────────────────┘
                 │
                 ▼
        ┌─────────────────┐  58
        │   CALCULATE     │
        │  LINEAR MODEL   │
        │       H         │
        └─────────────────┘
                 │
                 ▼
    ┌───────────────────────┐  60
    │   CALCULATE INVERSE   │
    │     LINEAR MODEL      │
    │         H⁻¹           │
    └───────────────────────┘
                 │
                 ▼
    ┌───────────────────────┐  126
    │   CALCULATE INVERSE   │
    │   NONLINEAR MODEL     │
    └───────────────────────┘
                 │
                 ▼
```
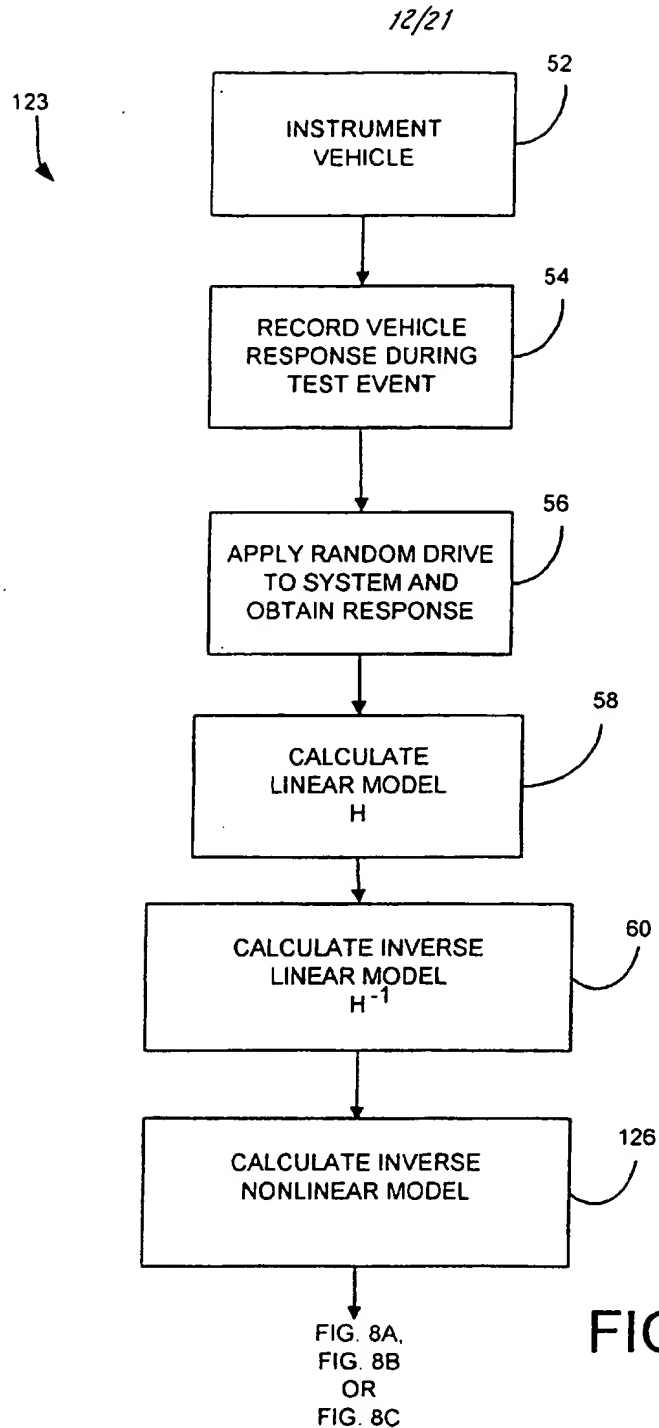
FIG. 8A,
FIG. 8B
OR
FIG. 8C

FIG. 7

FIG. 8A

FIG. 8B

FIG. 8C

16/21

DRIVE SIGNAL

142

10

148

RESPONSE SIGNAL

144

INVERSE NONLINEAR MODEL CALC

154

INVERSE NONLINEAR MODEL

DESIRED RESPONSE

154

INVERSE NONLINEAR MODEL

158

22

10

ERROR

INVERSE NONLINEAR MODEL

CORRECTION

10

154

158

FIG. 9

FIG. 10

FIG. 11

19/21

FIG. 12
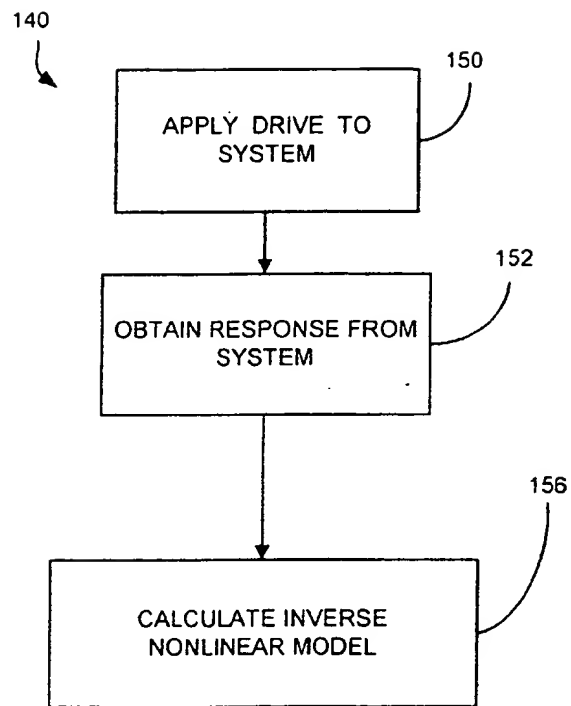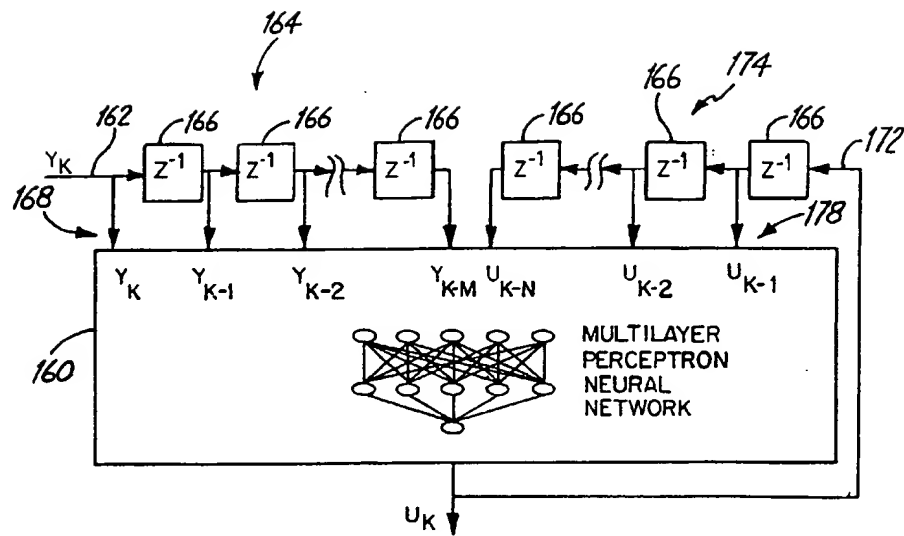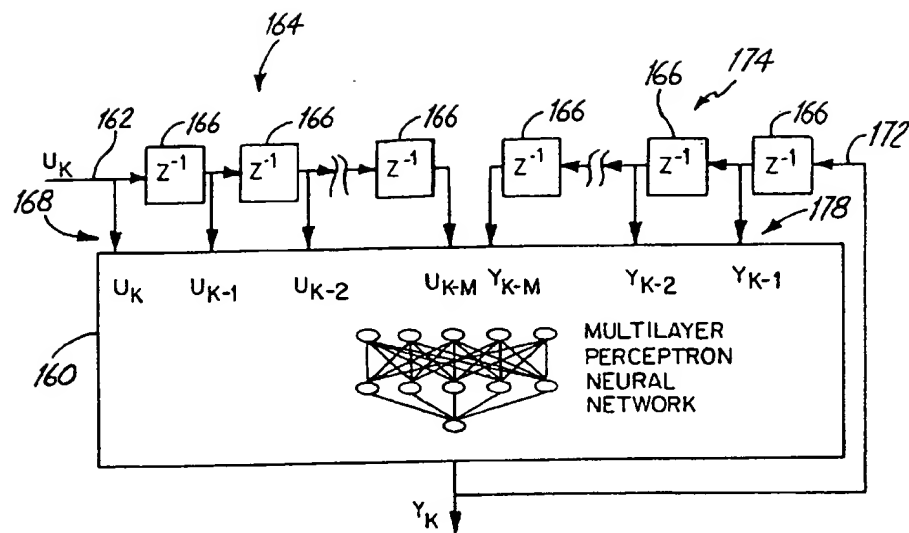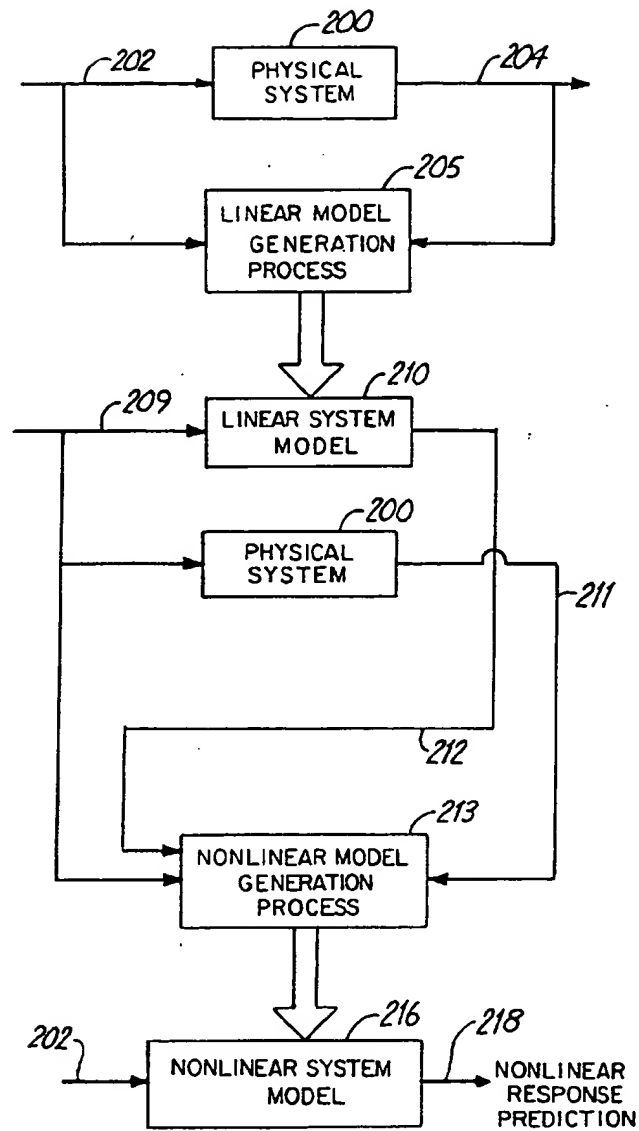
FIG. 13

21/21
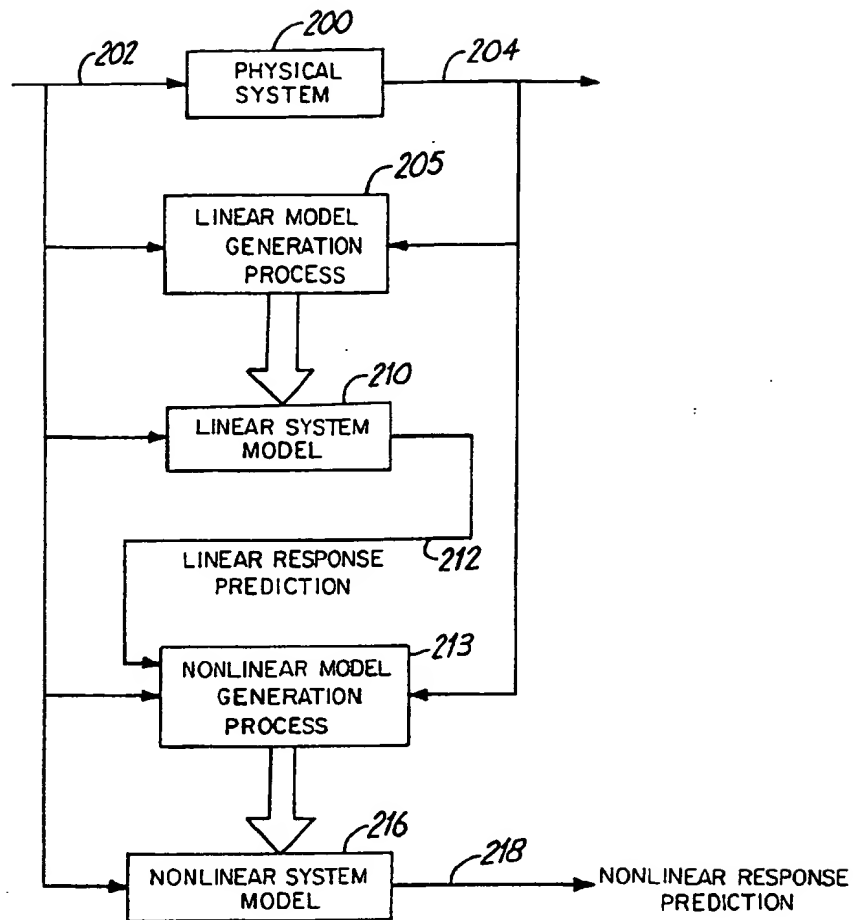
FIG. 14

INTERNATIONAL SEARCH REPORT

A.	CLASSIFICATION OF SUBJECT MATTER

IPC(6) :G06G 7/48
US CL : 703/8

According to International Patent Classification (IPC) or to both national classification and IPC

B.	FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 703/8, 1, 2, 6, 7, 21; 318/568.22, 561; 212/275; 360/78.14; 701/97

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

IEEE, STN

C.	DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4,885,692 A (KURIHARA et al.) 05 December 1989, col. 3-8	1-36
A	US 5,598,076 A (NEUBAUER et al.) 28 January 1997, col. 6-7	1-36
A	US 5,602,689 A (KADLEC et al.) 11 February 1997, col. 7-76	1-36
A	US 5,677,609 A (KHAN et al.) 14 October 1997, col. 4-8	1-36
A, P	US 5,908,122 A (ROBINETT et al.) 01 June 1999, col. 9-25	1-36

☐ Further documents are listed in the continuation of Box C.   ☐ See patent family annex.

*	Special categories of cited documents:	"T"	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A"	document defining the general state of the art which is not considered to be of particular relevance		
"E"	earlier document published on or after the international filing date	"X"	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L"	document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y"	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O"	document referring to an oral disclosure, use, exhibition or other means		
"P"	document published prior to the international filing date but later than the priority date claimed	"&"	document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
07 MARCH 2000	0 6 APR 2000

Name and mailing address of the ISA/US	Authorized officer
Commissioner of Patents and Trademarks	
Box PCT	
Washington, D.C. 20231	KEVIN TESKA
Facsimile No. (703) 305-3230	Telephone No. (703) 305-9704

Form PCT/ISA/210 (second sheet)(July 1992)*